


# GAS VALVES




*The heating product you need*

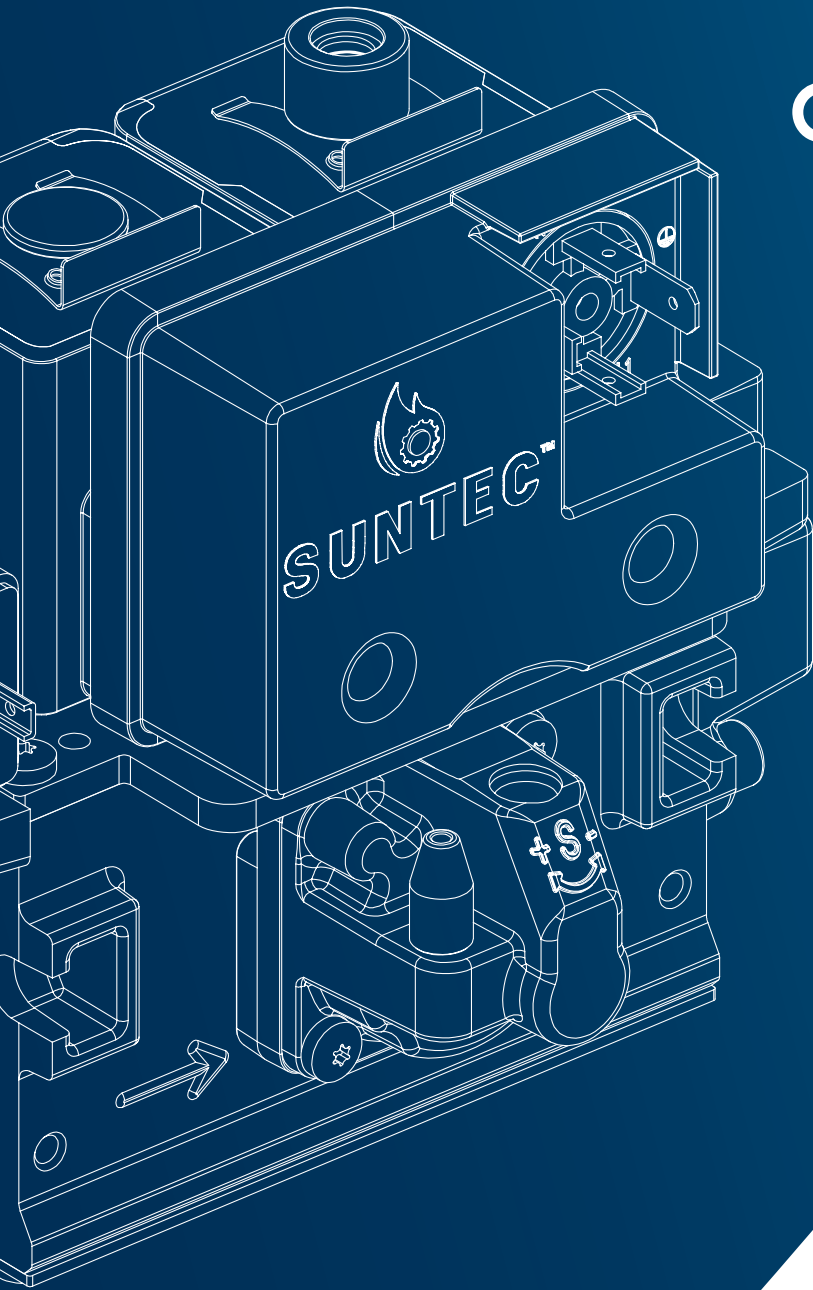

**SUNTEC™**

# Natural gas - LPG - Biogas - Hydrogen blend

## GAS VALVES

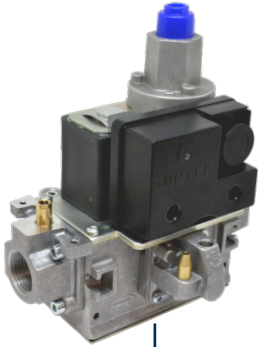


Multifunctional gas control equipped with 2 solenoid valves Class A (according to EN 161) and an outlet gas regulator (EN 88-1). Designed for pressure jet gas burners with a capacity up to 450 kW. Slow opening option available.

**M2C / M3C**

**M2N / M3N**

Combined gas control equipped with 2 solenoid valves Class A (according to EN 161) without gas regulator. Designed for pressure jet gas burners with a capacity up to 650 kW. Slow opening option available.

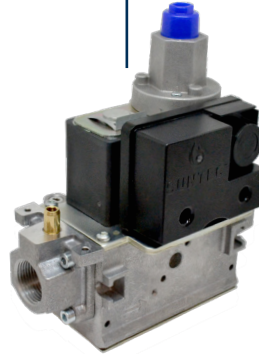

## PRESSURE SWITCHES



Settable pressure switch for gas appliance. Especially design to be installed on the multifunctional gas control. Range of pressure up to 150 mbar.

**DMG**

**F**

Settable pressure switch for gas (FCG and FSG) and air application (FCA). Range of pressure up to 500 mbar for the gas and up to 50 mbar for air.



## ACCESSORIES

**FLANGE**

For the connection to the gas pipe. Available in Rp3/4" or Rp1/2", with pressure plug, pressure switch or a cap.



3 pins connector for the electrical connection of the multifunctional/combined gas control and pressure switch. Design according to EN 175301-803.

**CONNECTOR**